


DUMPER

70 - 80 - 100 - 140

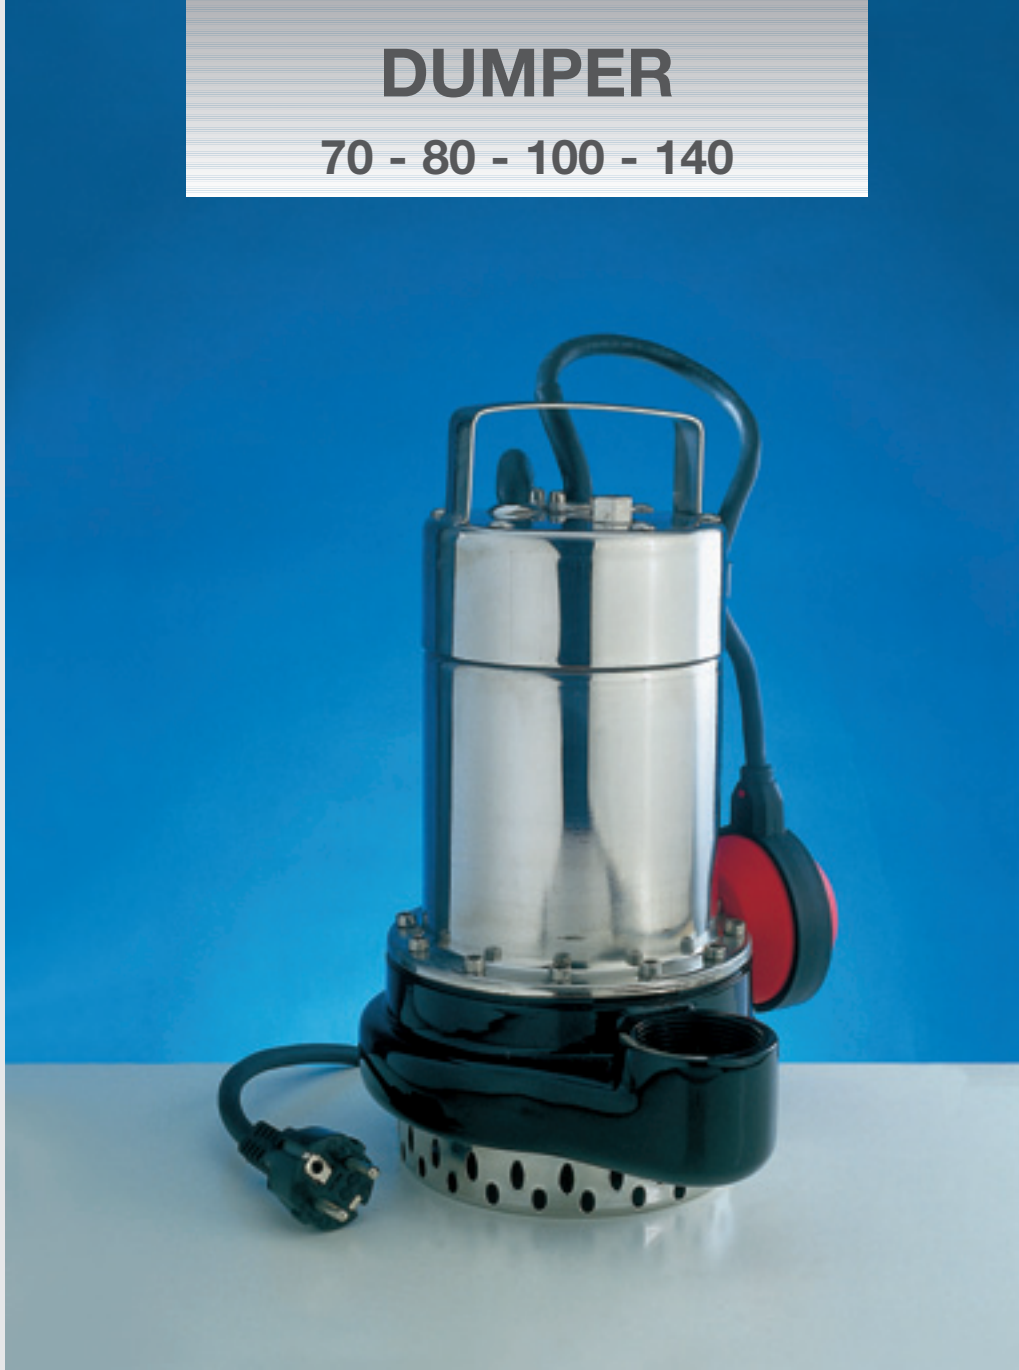

ELETTROPOMPE SOMMERGIBILI DRENAGGIO PER ACQUE SPORCHE SUBMERSIBLE ELECTRIC PUMPS FOR FOUL WASTEWATER DRAINAGE

PREVALENZA : 10,5 mt. ÷ 19,5 mt.
PORTATA : 12 m³/h ÷ 24 m³/h
POTENZA NOMINALE : 0,5 Kw (0,7HP) ÷ 1,1 Kw (1,5HP)





APPLICAZIONI

- SVUOTAMENTO DI CANTINE, AUTORIMESSE, SCANTINATI.
- SVUOTAMENTO DI PISCINE VASCHE IN GENERE E SERBATOI.
- SVUOTAMENTO DA ACQUE PIOVANE, D'INFILTRAZIONE, DI SCARICO DI POZZETTI O VASCHE DI RACCOLTA.
- IRRIGAZIONE ORTI E GIARDINI



PUMP HEAD : 10,5 m to 19,5 m
DELIVERY : 12 m³/h to 24 m³/h
RATED HORSEPOWER : 0,5 Kw (0,7HP) to 1,1 Kw (1,5 HP)

APPLICATIONS

- CELLAR, GARAGE AND BASEMENT PUMP OUT.
- SWIMMING POOLS, ALL SORTS OF VATS, TANKS AND RESERVOIR PUMP OUT.
- RAIN, SEEPAGE, SUMP PIT AND CATCH TANK WATER PUMP OUT.
- GARDEN AND VEGETABLE-GARDEN IRRIGATION.



ARVEN

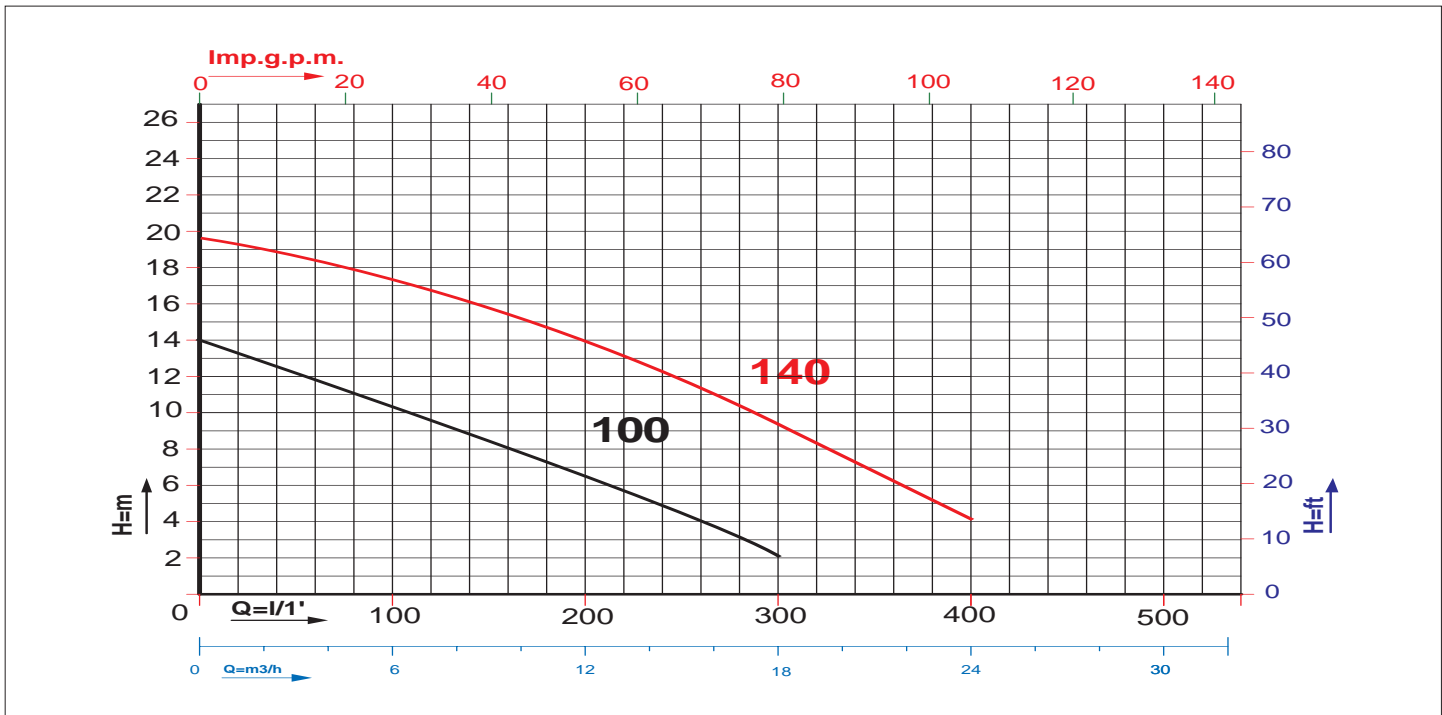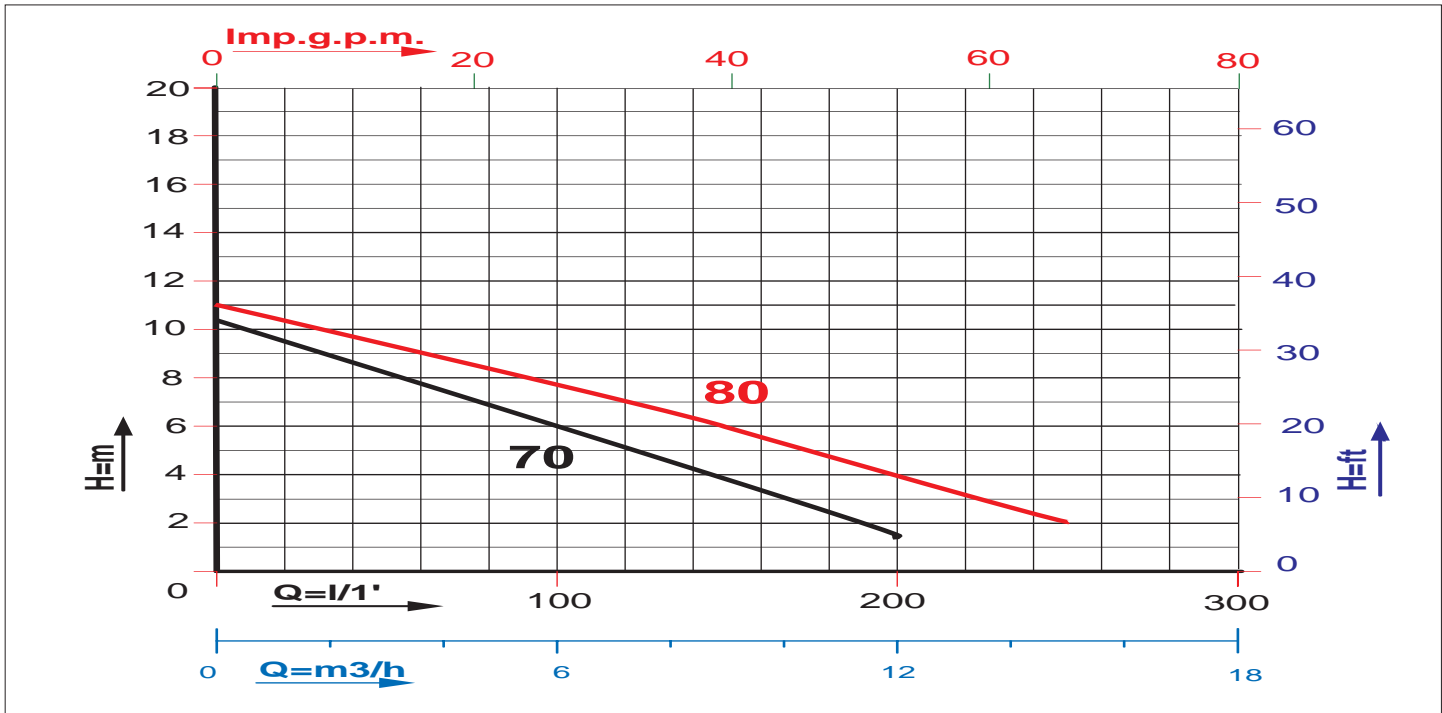

Caratteristiche di funzionamento a 2800 rpm 50Hz e 3450 rpm 60Hz - Performances at 2800 rpm 50 Hz and 3450 rpm 60 Hz
 Le prestazioni valgono per liquidi con densità $\rho = 1,0 \text{ kg/dm}^3$ ed una viscosità $\nu = 1 \text{ mm}^2/\text{s}$ / The performance data holds true for liquids with a $\rho = 1,0 \text{ kg/dm}^3$ density and a $\nu = 1 \text{ mm}^2/\text{s}$ viscosity.

MODELLO MODEL	VOLTAGGIO VOLTAGE	DATI ELETTRICI / ELECTRICAL DATA						DATI IDRAULICI / HYDRAULIC DATA																		
		P1max		P2 nom.		I max	Condensatore Capacitor		m³/h		H (m)								l/min.							
	50 Hz	Kw	Kw	HP	Ampere	µF	VC	0	1,5	3	6	9	12	15	18	24	0	25	50	100	150	200	250	300	400	
DUMPER 70 M	1 x 220-230V	0,8	0,5	0,7	3,7	14,5	450	10,5	9	7,8	6	3,4	1,6													
DUMPER 80 M	1 x 220-230V	1,1	0,6	0,8	4,5	16	450	11	10	9,2	7,5	6	4,2	2												
DUMPER 80 T	3 x 380-400V	1,0	0,6	0,8	2,1	---	---	11	10	9,2	7,5	6	4,2	2												
DUMPER 100 M	1 X 220-230 V	1,3	0,75	1	6	20	450	14	13,2	12,5	11	9,5	7,5	5	2											
DUMPER 100 T	3 x 380-400V	1,1	0,75	1	2,6	---	---	14	13,2	12,5	11	9,5	7,5	5	2											
DUMPER 140 M	1 x 220-230V	2,2	1,1	1,5	10,4	30	450	19,5	19	18,5	17,5	16	14	11,8	9,2	4										
DUMPER 140 T	3 x 380-400V	1,7	1,1	1,5	3	---	---	19,5	19	18,5	17,5	16	14	11,8	9,2	4										