

Flottante
Floating
Flottante



1

Bocca di mandata in ottone o acciaio inox.
Brass or stainless steel discharge head.
Pièce de refoulement en laiton ou en acier inox.



2

Valvola di non-ritorno incorporata sulla testata.
Discharge head non return valve.
Clapet anti-retour incorporé.



3

Bronzina superiore in gomma antisabbia.
Upper bush made in anti-sand rubber.
Palier supérieur en caoutchouc anti sable.



4

Giranti e diffusori in Noryl e Resina Acetalica.
Impellers and diffusers in Noryl and Acetal Resin.
Roues et diffuseurs en Noryl en Acétal Résin.



5

Camicia in acciaio inox.
Stainless steel shell.
Chemise en acier inox.



6

Filtro in acciaio inox.
Stainless steel strainer.
Crepine en acier inox.



7

Flangia d'accoppiamento in ottone o acciaio inox.
Bracket to couple to the motor in brass
or stainless steel.
Bride d'accouplement au moteur en laiton ou acier inox.

1



2



3



4



5




6




7



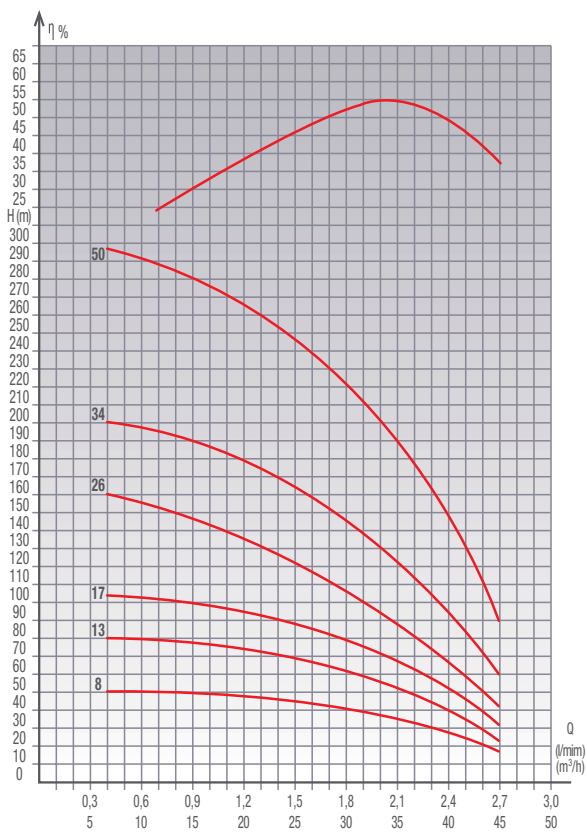

Tipo Type Type	Motore Motor Moteur		Q	Portata - Capacity - Debit										Dimensioni e Pesì Dimension and Weight Dimension et Masses			
	kw	HP		m³/h	0.3	0.6	0.9	1.2	1.5	1.8	2.1	2.4	3.0	mm		kg	
			L/min.	5	10	15	20	25	30	35	40	50	OT	INOX	OT	INOX	
FF45-8	0.37	0.50	PREVALENZA m - TOTAL HEAD m - HAUTEUR D'ELEVATION m	49	46	45	44	41	37	32	26	6	455	475	3.9	4.3	
FF45-13	0.55	0.75	81	79	76	72	66	60	52	41	8	570	590	4.6	5		
FF45-17	0.75	1	104	103	101	95	87	77	62	48	11	665	685	5.2	5.6		
FF45-26	1.1	1.5	158	154	146	138	128	116	97	76	15	875	895	6.8	7.2		
FF45-34	1.5	2	201	196	191	178	163	140	114	82	17	1060	1080	7.9	8.3		
FF45-50	2.2	3	296	288	278	263	242	216	185	144	21	1430	1450	10.3	10.7		

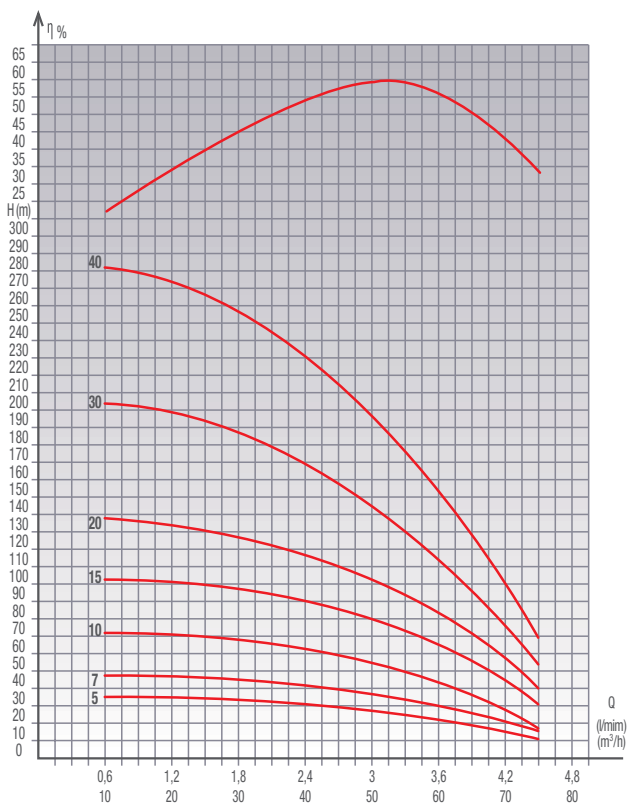

Tipo Type Type	Motore Motor Moteur		Q	Portata - Capacity - Debit								Dimensioni e Pesì Dimension and Weight Dimension et Masses			
	kw	HP		m³/h	0.9	1.2	1.8	2.4	3	3.6	4.2	4.8	mm		kg
			L/min.	15	20	30	40	50	60	70	80	OT	INOX	OT	INOX
FF95-5	0.37	0.50	PREVALENZA m - TOTAL HEAD m - HAUTEUR D'ELEVATION m	34	33	31	28	23	18	13	7	385	405	3.3	3.7
FF95-7	0.55	0.75	48	47	45	43	37	30	21	8	430	450	3.7	4.1	
FF95-10	0.75	1	70	69	65	58	50	38	27	9	500	520	4.1	4.5	
FF95-15	1.1	1.5	103	102	95	87	76	62	43	16	620	640	4.9	5.4	
FF95-20	1.5	2	133	132	127	113	99	78	56	21	735	755	5.6	6	
FF95-30	2.2	3	202	196	185	165	144	114	77	36	965	985	7.2	7.6	
FF95-40	2.2	3	278	273	258	227	190	150	103	42	1200	1220	8.7	9.1	

