

PC²'nin TEKNİK ÖZELLİKLERİ

Boru Çapı	Debisi	İç Çapı	Dış Çapı	Et Kalınlığı	İşitm. Basıncı	Filtre
mm	L/saat	mm	mm	mm	Bar	(mesh)
16	2.2	13.8	16	1.1	0.5-4.5	150
16	3.8	13.8	16	1.1	0.5-4.5	120
20	2.2	17.5	20	1.25	0.5-4.5	150
20	3.8	17.5	20	1.25	0.5-4.5	120

BASINÇ AYARLI BORULARIMIZIN DAMLATICI DEBİLERİNİN BASINÇ İLE İLİŞKİSİ


BAR	PC ² 16mm		PC ² 20 mm	
	3.8 l/saat	2.2 l/saat	3.8 l/saat	2.2 l/saat
0	0	0	0	0
0.5	3.9	2.1	3.8	2.2
1	3.7	2	3.6	2.15
1.5	3.6	2.1	3.6	2.2
2	3.7	2.15	3.8	2.23
2.5	3.8	2.2	3.85	2.26
3	3.9	2.2	3.9	2.3
3.5	3.9	2.20	3.9	2.28
4	3.9	2.15	3.9	2.25
4.5	3.9	2.15	3.9	2.2

(PC² 16 mm) BASINÇ AYARLI DAMLA SULAMA BORULARININ MAKSİMUM UZATMA MESAFESİ (metre)

Damlatici Arası (m)	İç Basınç (BAR)							
	16 mm / 2.2 l/saat				16 mm / 3.8 l/saat			
	1.5	2.5	3.5	4.5	1.5	2.5	3.5	4.5
0.25	65	90	110	120	50	65	75	85
0.3	75	105	125	135	60	75	85	95
0.33	85	115	135	145	65	80	90	100
0.4	95	130	155	170	75	90	105	115
0.5	115	155	185	195	90	110	130	140
0.6	135	180	210	220	100	125	150	160
0.75	150	215	245	265	120	145	165	180
0.8	165	225	260	275	125	155	175	190
1	200	250	300	325	140	180	215	225
1.25	225	305	355	375	160	210	250	275
1.75	275	375	440	470	200	265	315	345

(PC² 20 mm) BASINÇ AYARLI DAMLA SULAMA BORULARININ MAKSİMUM UZATMA MESAFESİ (metre)

Damlatici Arası (m)	İç Basınç (BAR)							
	20 mm / 2.2 l/saat				20 mm / 3.8 l/saat			
	1.5	2.5	3.5	4.5	1.5	2.5	3.5	4.5
0.25	125	145	165	180	90	115	130	150
0.3	145	170	190	210	95	125	150	170
0.33	155	185	210	225	110	130	160	180
0.4	185	215	245	265	115	150	180	200
0.5	220	260	290	315	140	180	220	240
0.6	250	300	335	365	160	205	240	275
0.75	295	355	395	430	185	235	280	320
0.8	310	365	410	450	190	255	290	335
1	365	430	485	525	215	300	340	400
1.25	425	505	570	620	285	340	380	415
1.75	540	640	720	785	360	430	480	525

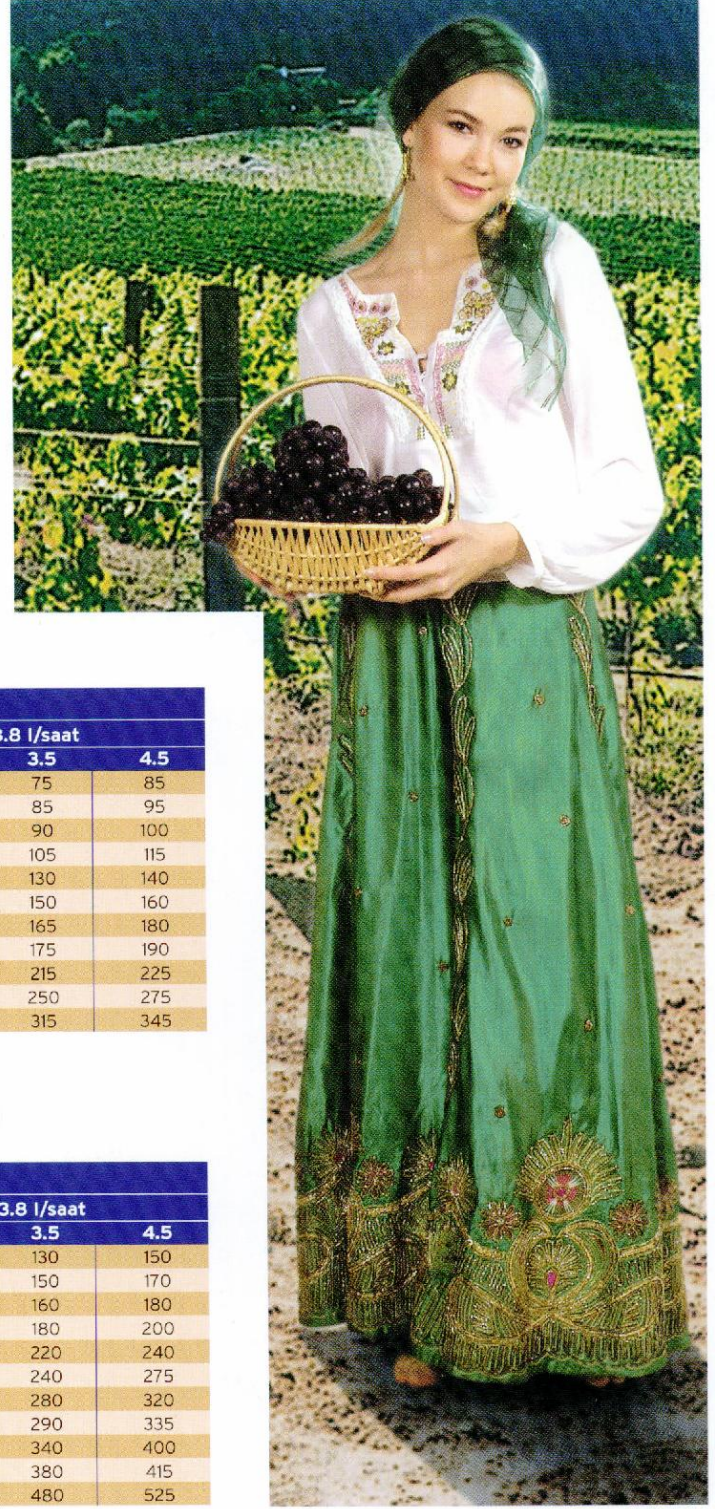

Eurodrip
Damla Sulama Sistemleri